


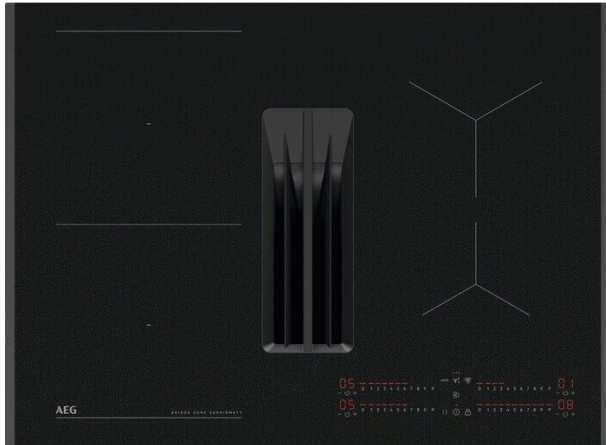

#### More freedom in the kitchen

The 6000 Bridge Extractor Hob combines an induction hob to fit a 60cm cabinet, with a powerful built-in extractor for optimal air flow. It also has a Bridge function, allowing you to combine two cooking zones into one for larger cookware.

#### Product Benefits & Features

##### The Bridge Extractor Hob. For greater kitchen freedom

The Bridge Extractor Hob combines an induction hob to fit a 60cm cabinet with a powerful built-in extractor for optimal airflow. The hob's Bridge function also allows you to combine two cooking zones into one for larger cookware.



##### Modern, matt black beauty. Our most scratch-resistant surface

A modern design statement at the heart of your kitchen. The SaphirMatt® hob's matt black finish enhances its minimalist aesthetic. Made with our most scratch-resistant, fingerprint-resistant surface for lasting, effortless beauty.

##### 4 Individual Zone Controls. Unlimited cooking options

4 Individual Zone Controls, with 9 power levels, allow you to Individually control 4 different cooking areas and set separate timers for each. Other functions include power boost, active touch, child lock and automatic extractor control.



##### Long-Life Carbon Filter. Clean and re-use multiple times

The Long-Life Carbon Filter is easy to clean, so your kitchen air stays fresh, and your fan runs at its best for longer. Filters can be loaded in the dishwasher for cleaning, easily refitted and regenerated up to 8 times for extended life.



##### Automatic Extractor Control. Adjusts as you cook

Automatic Extractor Control allows you to focus on what matters – cooking. The hob will automatically switch on and adjust the extraction level according to your cooking activities, keeping your kitchen fresh and hands free.




- Child lock safety function.
- Auto safety switch off: The power automatically turns off if a cooking zone is left on for too long.
- Grease filter indicator.
- Charcoal filter indicator.

Product Specification

|                                                   |                           |                                                         |             |
|---------------------------------------------------|---------------------------|---------------------------------------------------------|-------------|
| Frame Type                                        | Bevelled 2 Sides          | Recirculated Extraction Rate - Min/Max/Intensive (m³/h) | 250/480/585 |
| Dimensions (mm) (WxD)                             | 710x520                   | Ducted Noise Level - Min/Max/Intensive (dB)             | 50/66/69    |
| Built-in Dimensions (mm) (HxWxD)                  | 225x680x490               |                                                         |             |
| Air Outlet (mm)                                   | 220                       |                                                         |             |
| Grease Filter Type                                | Aluminium mesh            |                                                         |             |
| Number of Grease Filters                          | 2                         |                                                         |             |
| Aperture Cut Out (mm)                             | 5                         |                                                         |             |
| Energy Rating                                     | A+                        |                                                         |             |
| Fluid Dynamic Efficiency Rating                   | A                         |                                                         |             |
| Grease Filter Efficiency Rating                   | B                         |                                                         |             |
| Motor Type                                        | Brushless                 |                                                         |             |
| Cord Length (m)                                   | N/A                       |                                                         |             |
| Bar Code                                          | 7333394075808             |                                                         |             |
| Product Number (PNC)                              | ER                        |                                                         |             |
| Plug or Hardwired                                 | Hardwired connection only |                                                         |             |
| Left Front - Power/Diameter                       | 2300/3200W/210mm          |                                                         |             |
| Left Rear - Power/Diameter                        | 2300/3200W/210mm          |                                                         |             |
| Right Front - Power/Diameter                      | 1400/2500W/145mm          |                                                         |             |
| Right Rear - Power/Diameter                       | 1800/2800W/180mm          |                                                         |             |
| Number of cooking zones                           | 4                         |                                                         |             |
| Series                                            | 6000                      |                                                         |             |
| Hob Type                                          | Induction ExtractorHob    |                                                         |             |
| Ducted Extraction Rate - Min/Max/Intensive (m³/h) | 650/550/270               |                                                         |             |

PSGBHH220DE0000N

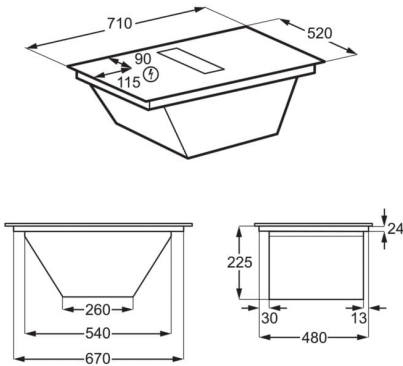

PSGBHO230DE0000N

